




NS-PVC105

Flame Retardant PVC tube

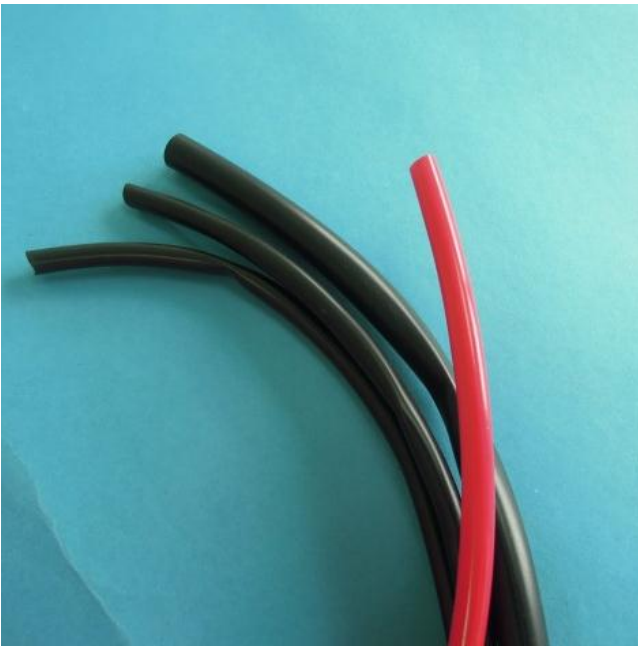

Description

Flame retardant PVC tube boast excellent electrical and mechanical properties and find broad applications mainly in wire harness insulation and protection purposes in household appliances, automobiles, motorbikes.

Features


- Flammability: VW-1
- Operating temperature: -30°C~105°C
- Standard color: 10 standard colors available on request



Technical Performance

Property	Typical Data
Tensile strength	≥16 MPa
Elongation at break	≥150%
Max. TS Change after heat ageing	±20%
Max. Elongation change after heat ageing	±20%
20°C Volume resistivity	≥10 ¹² Ω.m

Structure

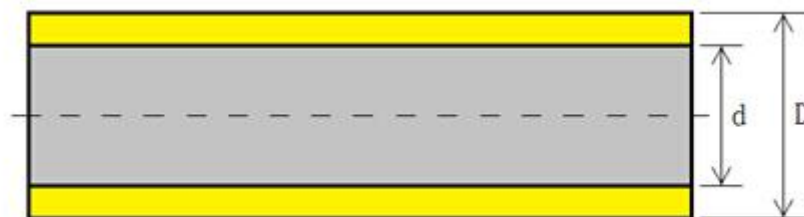

Sizes

- ID: $\Phi 3.0\text{mm} \sim \Phi 30.0\text{mm}$, Can be customize on your request
- Wall thickness: 0.3mm~2.0mm