




TZRS-HW (2X)

Non-slip Textured Heat Shrink Tube

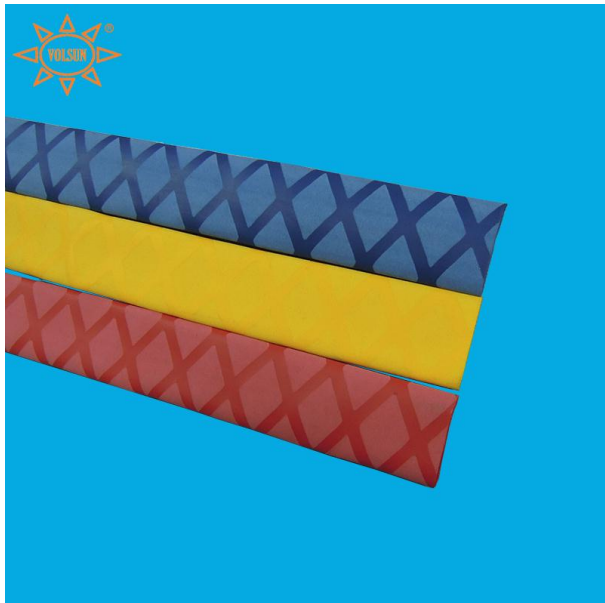

Description

Non-slip textured heat shrink tubing is made of irradiation cross-linked polymer alloy, followed by a surface treatment. This products typically used for non-slip, non-skid decorative purpose for handles and grips on high grade fishing tackle, sport equipment, fitness equipment, daily supplies, various tools, kitchenware etc..

Features


- Flexible, fast shrinking
- Non slip, nice-looking, user-friendly
- Min shrink temperature:60
- Min full recovery temperature:105°C
- Continuous operating temperature:-55°C ~110°C
- Shrink ratios:2:1
- RoHS compliant
- Standard color: Black, Red, Yellow, Green, Blue



Technical Performance

| Property | Typical Data | Test Method |
|---------------------|--------------|-------------|
| Tensile strength | ≥10.4MPa | ASTM D 2671 |
| Elongation | ≥200% | ASTM D 2671 |
| Longitudinal change | -8% ~ +8% | ASTM D 2671 |

Structure

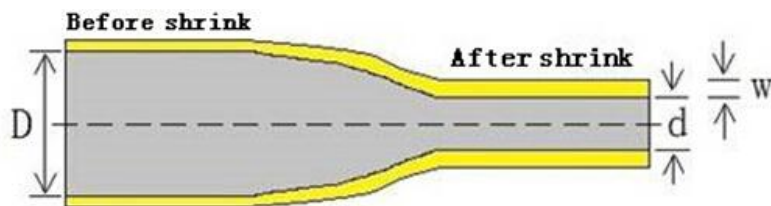



Dimensions

| Size(mm) | As supplied (mm) | | Recovered(mm) | | Standard (m/pc) |
|----------|------------------|----------------|----------------------|----------------|--------------------|
| | Inner diameter | Wall thickness | Internal diameter | Wall thickness | |
| φ15 | ≥15 | 0.45±0.15 | 8 | 0.85±0.15 | 1.0 |
| φ20 | ≥20 | 0.50±0.15 | 11 | 0.90±0.15 | 0.8/1.0/1.6 |
| φ22 | ≥22 | 0.50±0.15 | 12.5 | 0.90±0.15 | 0.8/1.0/1.6 |
| φ25 | ≥25 | 0.50±0.15 | 14.5 | 1.00±0.15 | 0.8/1.0/1.6 |
| φ28 | ≥28 | 0.50±0.15 | 15.5 | 1.00±0.15 | 0.8/1.0/1.6 |
| φ30 | ≥30 | 0.60±0.15 | 17.5 | 1.20±0.15 | 0.8/1.0/1.6 |
| φ35 | ≥35 | 0.60±0.15 | 20.0 | 1.20±0.15 | 0.8/1.0/1.6 |
| φ40 | ≥40 | 0.60±0.15 | 23.0 | 1.20±0.15 | 0.8/1.0/1.6 |
| φ45 | ≥45 | 0.65±0.15 | 25.0 | 1.25±0.15 | 0.8/1.0/1.6 |
| φ50 | ≥50 | 0.65±0.15 | 28.0 | 1.25±0.15 | 0.8/1.0 |

Note: Non-standard dimensions and packages also available on your request